


PRODUCT DATA SHEET

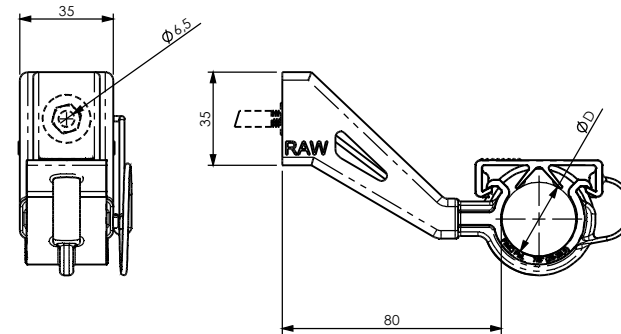

A) SPECIFICATIONS

- 1 Cable clamp. Material: PA6-VO, black colour, self extinguishing, halogen free (according to UL94-VO).
- 2 AISI 316 RSD safety clamp

B) OPERATING TEMPERATURE


Working temperature : -40°C +125°C.
Installation temperature : -20°C +60°C.

C) DELIVERY MODALITIES

Packing in boxes. Label indicating:
product code, article, quantity,
production batch, FIMO logo and figure.
(Customer code on request).

D) MOUNTING INSTRUCTIONS

IT043

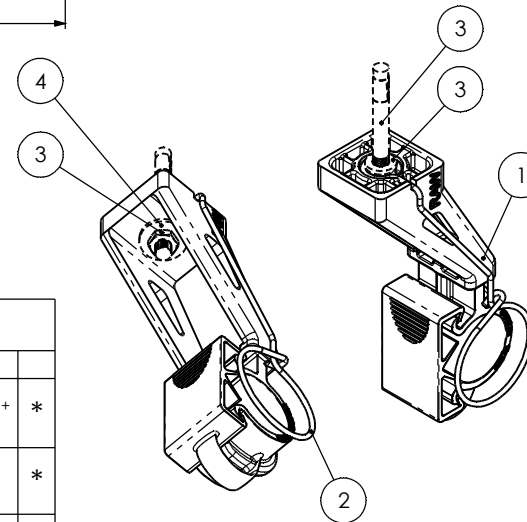

ANCHOR SOLUTIONS				
ITEM N.	CODE	DESCRIPTION	MATERIAL	
3 4	1013010655 + 0129360618	MF 6x 55/25 + RPI 6/18	Galvanized Mild Steel + AISI 304	*
OPTION	1013020665 + 0129360618	MFI 6x 65/25 + RPI 6/18	AISI 304 + AISI 304	*
OPTION	1013020665.316 + 0129360618.316	MFI 6x 65/25 + RPI 6/18	AISI 316 + AISI 316	*
code 6150210079				
article RAW 7/8" M-80 + RSD 7/8"-80				

D		
26.5-28	50	0.0597kg

RI	DATE	DR	DATE	AP	Description: RAW 7/8" M-80 + RSD 7/8"-80 Radiating Cable Clamps
02					
01					
00	05/12/2016	E.B.	05/12/2016	A.V.	
1 st EMISSION					
 Setting Installation Standards					RoHS  Use: <i>Horizontal or vertical installation of radiating cables in tunnel</i> <i>* Suitable for installation in high speed railway tunnel application (350 km/h)</i>

F.I.MO.TEC. S.p.a. reserves the right to modify the technical specifications without prior notice, according to the technical progress
Copyright F.I.MO.TEC. S.p.a. All rights reserved.