


PRODUCT DATA SHEET

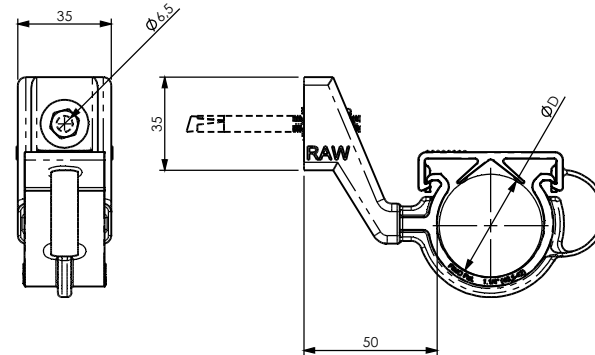

A) SPECIFICATIONS

1 Cable clamp. Material: PA6-VO, black colour, self extinguishing, halogen free (according to UL94-VO).

B) OPERATING TEMPERATURE


Working temperature : -40°C +125°C.
Installation temperature : -20°C +60°C.

C) DELIVERY MODALITIES

Packing in boxes. Label indicating: product code, article, quantity, production batch, FIMO logo and figure. (Customer code on request).

D) MOUNTING INSTRUCTIONS

IT043

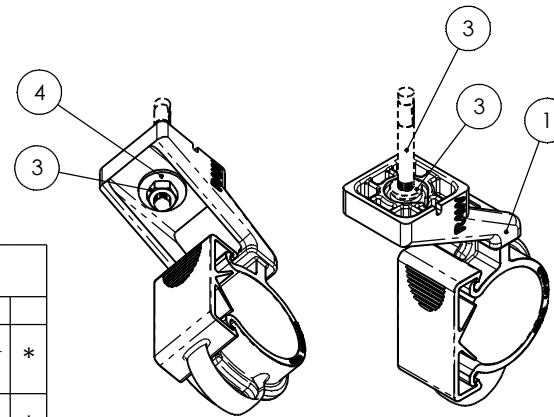

ANCHOR SOLUTIONS				
ITEM N.	CODE	DESCRIPTION	MATERIAL	
3	1013010655 +	MF 6x 55/25 +	Galvanized Mild Steel +	*
4	0129360618	RPI 6/18	AISI 304	
OPTION	1013020665 +	MF1 6x 65/25 +	AISI 304 + AISI 304	*
	0129360618	RPI 6/18		
OPTION	ME25010188	R8- 80 SP	Galvanized Mild Steel + NYLON PA	
code 6150215159				
article RAW 1.1/4" M-50 (50.5 - 52)				

D		
40.5-42	50	0.0522kg

RI	DATE	DR	DATE	AP	Description: RAW 1.1/4" M-50 (50.5 - 52) Radiating Cable Clamps
02					
01					
00	11/09/2015	E.B.	11/09/2015	A.V.	
1 st EMISSION					
 Setting Installation Standards 					Use: <i>Installation of radiating cables in tunnel</i> <i>* Suitable for installation in high speed railway tunnel application (350 km/h)</i>

F.I.MO.TEC. S.p.a. reserves the right to modify the technical specifications without prior notice, according to the technical progress
Copyright F.I.MO.TEC. S.p.a. All rights reserved.